

#### Technical data:

Code	SLI035012NW
Power	32 W
Nominal current	154 mA
Voltage	230 V
Energy efficiency class	LED
Energy consumption	32 kWh/1000h
Frequency	50HZ
Protection class	II
Power supply included	+
Manufacturer of power supply	N/A
Power factor	0.9
Luminous flux	3240 lm
Lamp efficacy	101 lm/W
Luminous intensity	N/A cd
Colour temperature	4000 K
Colour of light	NW
Beam angle	120°
UGR	<22
RA	80
Light source included	N/A
Producer of LED diodes	N/A
Uniformity of color SDCM max	5
Dimmable	OPTION
Working temperature range	-20/+40 °C
Lifespan	17000 h
Housing material	ALUMINIUM, PLASTIC
Socket	N/A
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x10 mm
Mounting hole	575x575 mm
Weight	2.09 kg
For use	wewnqtrz
Assembly	In the ceiling/On the ceiling/Pendant
Application	INT
Number of pieces on the packaging	6 pcs.
Whether it should work in conditions other than normal	N/A
Made in	PRC



#### Additional information:

Also available as DALI, DIM, DIMRF.


LED LUMINAIRE  
**ALGINE**

---




**Related documents:**

---

 Declaration of Conformity

EEI table LED :

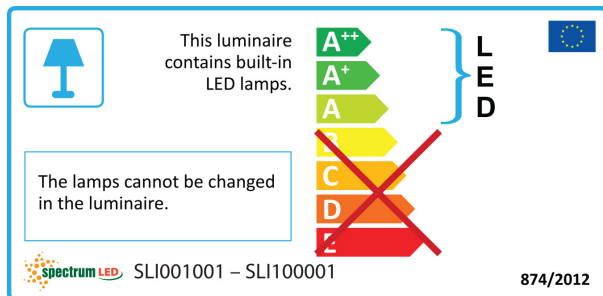

Available accessories:

N/A -