


31181 GRUN v3 LED-20-B

LED floodlight

8595665311810

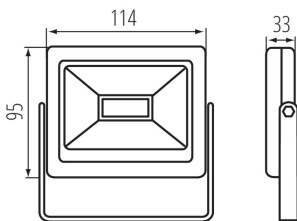

GENERAL DATA:

Colour: black
Place of assembly: wall mounted, ceiling mounted
Place of application: for industrial applications
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Width [mm]: 114
Height [mm]: 95
Depth [mm]: 33
Mercury content: no
Integrated LED light source: yes


TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Class of protection against electric shock: I
Diode type: LED SMD
Luminous flux [lm]: 1800
Useful luminous flux of the light source Φ_{use} [lm]: 1570
Useful luminous flux of the light source Φ_{use} [lm]: in wide cone (120°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Service life [h]: 20000
Number of on/off cycles: ≥ 15000
Ambient temperature range to which the product can be exposed: -15÷35
Enclosure material: aluminum alloy, plastic
Protective glass material: Tempered glass
Extension-arm material: steel
Connection type: Free cable ends
Wire diameter [mm²]: 1
Reflector type: symmetrical
Lamp-heating time [s]: $\leq 0,5$
Lamp-ignition time [s]: $\leq 0,5$
The fixture is movable vertically [°]: 180
IP class: 65

LOGISTIC DATA:

Packaging method: 24
Number of units in the secondary packaging: 1
Number of units in the packaging: 24
Net unit weight [g]: 242
Grammage [g]: 287.5

Length of a unit pack [cm]: 12.5
Width of a unit pack [cm]: 4.5
Height of a unit pack [cm]: 10.5
Weight of a cardboard box [kg]: 6.9
Width of a cardboard box [cm]: 27
Height of a cardboard box [cm]: 23
Length of a cardboard box [cm] : 28.5
Volume of a cardboard box [m³]: 0.017699

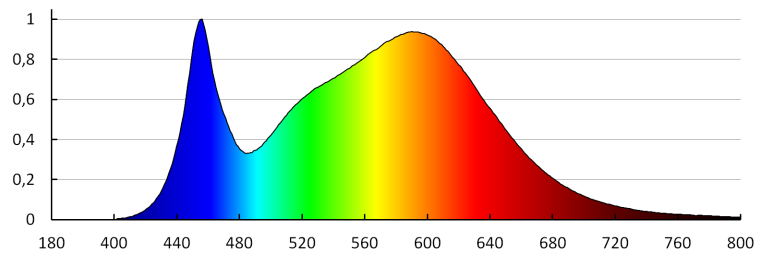

MILEDO (kat 31181) GRUN V3 LED-20-B / LDC (Polar)

Luminaire: MILEDO (kat 31181) GRUN V3 LED-20-B
Lamps: 1 x GRUN V3 LED-20-B

